




Technology Sheet

DXT-Cable – AS2xxx

| | |
|------------------------------|--|
| Cable lengths | |
| standard | 1, 2, 3, 4, 5, 6, 7, 10, 15, 20 meter 25, 30, 35, 40, 45, 50, 60, 70, 80 meter 100, 150, 200, 250, 300 meter |
| custom | available |
| Cable length accuracy | |
| standard | ±0.5 % (≥1 cm) |
| custom | ±1 % (≥1 cm) |
| Cable stretch | < 1 % |
| Cable length adjustment | up to 40 % of length |
| Ingress Protection | IP67 |
| Temperature range | -20 °C to 80 °C |
| Material of connectors | nylon PA6, fiberglass-reinforced (30 %) |
| Material of cable insulation | polyurethane (PU) |

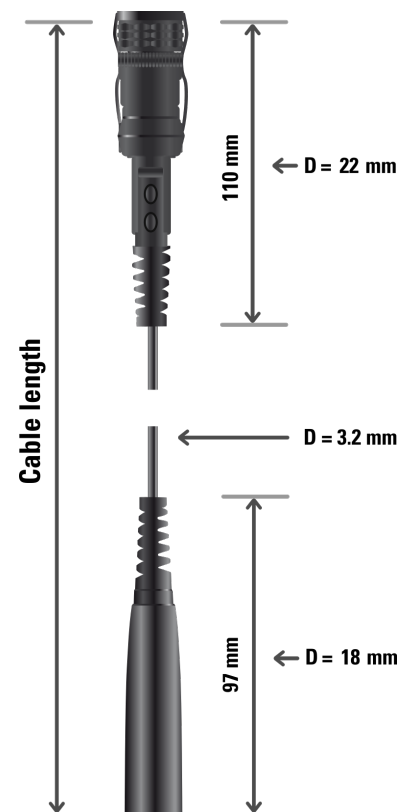

Picture is for illustration purpose only. Actual product may vary due to product enhancement.